



### SPECIAL FEATURES


- Metal Chassis
- Trigger Source Switching
- 2D Comb Filter
- BNC Video 2 In / 2 Out, S-Video 1 In / 1 Out, VGA 1 In, Audio 2 In, PC Stereo 1 In
- Multi-Language Support
- Built-In Speakers
- Wall and Rack Mount Kit

### SPECIFICATIONS

		20RTC
Display	Screen Size	20.1 Inch
	Max. Resolution	640 x 480 @ 75Hz
	Pixel Pitch	0.637 x 0.637mm
	Brightness	300cd/m <sup>2</sup>
	Contrast Ratio	800 : 1
	Aspect Ratio	4 : 3
	Viewing Angle (H/V)	178° / 178°
	Display Color	16.2 Million
	Response Time	< 25ms
	Video System	NTSC / PAL
Interface	Video In / Out (BNC Type)	2 / 2
	S-Video In / Out	1 / 1
	VGA In (15Pin D-Sub)	1
	Audio In (RCA Type)	1(L+R)
Transmitter	PC Stereo In	1
	Remote Control	Yes
Audio	Built-in Speakers	Yes (2W x 2)
	Filter Type	2D Comb Filter
Features	LCD Protection Glass	Yes
	Multi Language	English, Spanish, French
	Outline Dimension	17.87" W x 15.04" H x 2.71" D
Dimension	Net. Weight	7.9Kg (17.6lbs)
	Material / Color	Metal / Black
Cabinet	Base Stand	Folding Leg
	Part/Labor	2year / 2year
Warranty	MTBF (Approx.)	50,000 Hours
Regulations		RoHs, TUV NRTL (optional) , CB, FCC(A), CE-Emc(LVD)
Power	Consumption: < On	< 55W
	Electrical Ratings	AC100 ~ 240V(50/60Hz) DC12V / 5A
Circumstance	Operating Temperature	0 ~ 50° C / 32 ~ 122° F
	Storage Temperature	-20 ~ 60° C / -4 ~ 140° F
Mounts	VESA™ Mount Size	100 x 100mm (BS M4 x 10mm Screw)
	Wall	WB-5, WB-10, WB-30, WB-31
	Ceiling	CMK-01
	Rack	RMK-08

\*Design and specifications are subject to change without notice

### DIMENSIONS

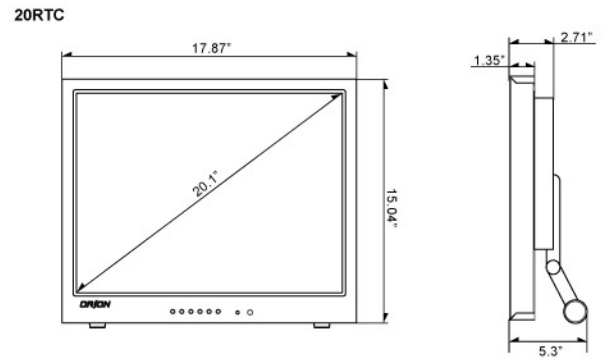

### MOUNT OPTION

