



## SPECIAL FEATURES


- Metal Chassis
- PIP / PBP Multi Display Function
- 3D Comb Filter / Deinterlace, Noise Reduction, LCD Protection Glass, Source Cycle Function, Trigger Source Switching, Multi-Language Support
- BNC Video 2 In / 2 Out, S-Video 1 In / 1 Out, VGA 1 In, Component 1 In, DVI-D 1 In, HDMI 1 In, Audio 2 In, PC Stereo 1 In
- Built-In Speakers
- Wall and Rack Mount Kit

## SPECIFICATIONS

		24RTC	
Display	Screen Size	24 Inch	
	Max. Resolution	1920 x 1200 @ 60Hz	
	Pixel Pitch	0.270 x 0.270mm	
	Brightness	300cd/m <sup>2</sup>	
	Contrast Ratio	800 : 1	
	Aspect Ratio	16 : 9	
	Viewing Angle (H/V)	160° / 160°	
	Display Color	16.7 Million	
	Response Time	< 5ms	
	Video System	NTSC / PAL	
Interface	Video In / Out (BNC Type)	2 / 2	
	S-Video In / Out	1 / 1	
	VGA In (15Pin D-Sub)	1	
	Component	1	
	DVI-D In / HDMI In	1 / 1	
	Audio In (RCA Type)	3 (L+R)	
	PC Stereo In	1	
Transmitter	Remote Control	Yes	
Audio	Built-in Speakers	Yes (2W x 2)	
	Picture In Picture (PIP)	Analog / Digital	
Features	Picture By Picture (PBP)	BNC / BNC	
	Filter Type	3D Comb Filter / Deinterlace	
	Trigger Sensor	Yes (NO / NC)	
	LCD Protection Glass	Yes	
	Noise Reduction	Yes	
	Auto Source Sequencing	Yes	
	Multi Language	English, Spanish, French, German, Italian	
	Dimension	Outline Dimension (W x H x D)	22.05" x 15.55" x 3.45"
		Net. Weight	8.61Kg (19lbs)
Cabinet	Material / Color	Metal / Black	
	Base Stand	Folding Leg	
Warranty	Part/Labor	2year / 2year	
	MTBF (Approx.)	50,000 Hours	
Regulations	RoHs, TUV NRTL (optional) , CB, FCC(A), CE-Emc(LVD)		
	Consumption: < On	< 60W	
Power	Electrical Ratings	AC100 ~ 240V(50/60Hz)	
	Circumstance	Operating Temperature	0 ~ 50° C / 32 ~ 122° F
Storage Temperature		-20 ~ 60° C / -4 ~ 140° F	
Mounts	VESA™ Mount Size	100 x 100mm (BS M4 x 8mm Screw)	
	Wall	WB-5, WB-10, WB-30, WB-31	
	Ceiling	CMK-01	

\*Design and specifications are subject to change without notice

## DIMENSIONS

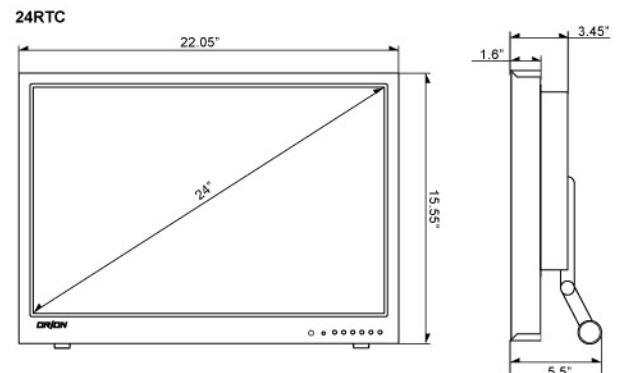

## MOUNT OPTION

